

Battery Replacement Instructions

for the ProCurve Series 3500yl and 6200yl Switches


The battery is used to keep time for the internal switch clock. There is no LED indicator for when the battery no longer has sufficient power. The only indication will be the internal clock will not keep the correct time. The battery is not hot swappable. Replacing the battery must be done during scheduled downtime.

WARNING

- **The battery requires special handling at end-of-life. The battery can explode or cause burns if disassembled, charged, or exposed to water, fire or high temperature. After replacing the battery, properly dispose of used battery according to instructions.**
 - **There is a risk of explosion if the battery is replaced by an incorrect type. Ensure to replace the battery with the same type.**
 - **To avoid the possibility of electric shock, all power cords must be disconnected from the switch before starting this procedure.**
-


To install (or replace) a Battery:

1. Disconnect the power cable from the switch.
2. Using a Torx T-10 screwdriver remove all the screws securing the top of the switch, and remove the top.
3. Remove the used battery and dispose of properly.

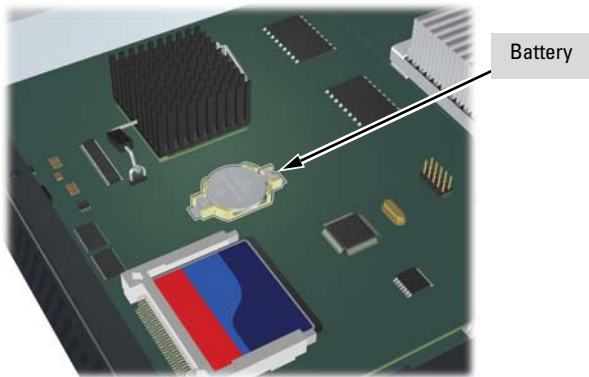

4. Insert a new battery with the lettering and the plus "+" sign facing up.

5. Reinstall the top of the switch. Align the top cover pin with the hole.

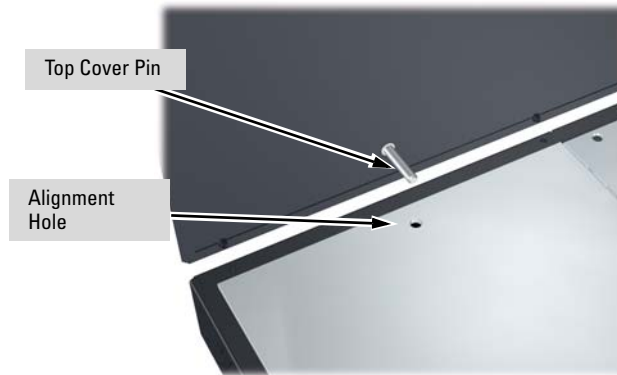

6. Reinstall and tighten all the screws securing the top.
7. Reconnect the power cable to the switch.

ATTENTION

Il y a danger d'explosion s'il y a remplacement incorrect de la batterie.

Remplacer uniquement avec une batterie du même type ou d'un type équivalent recommandé par le constructeur.

Mettre au rebut les batteries usagées conformément aux instructions du fabricant.

© Copyright 2006 Hewlett-Packard Development Company, LP. All rights reserved. The information contained herein is subject to change without notice.

This document contains proprietary information, which is protected by copyright. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of Hewlett-Packard.

Technical information in this document is subject to change without notice.



January 2006
Edition 1