

Replacing the Management Module Flash Card


for the ProCurve Series zl Switches Management Module

The switch does not have to be powered off, however when the management module is removed all ports will lose communication. ProCurve Networking recommends replacing the Flash Card during scheduled down time.


1. Using either a flat-bladed or Torx T-10 screwdriver loosen the retaining screws securing the management module. (You cannot access the Compact Flash when the management module is installed.)
2. Using the extractor handles, pull the module out from the slot.
3. Slide out the old flash card by applying slight pressure to the top of the flash card and sliding it to the left.
4. Slide in the new flash card being careful not to bend any connector pins.
5. Re-install the module into the switch.
6. Use an equal amount of pressure and push both extractor handles closed to completely seat the module.
7. Tighten the retaining screws.

The 5400zl and 8200zl Management Modules look different, however they are both located in the upper right corners of their respective chassis.


1.

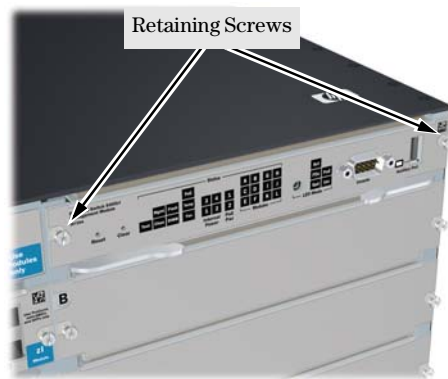


2.

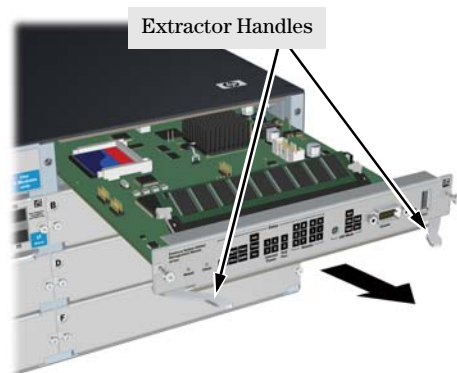

3.

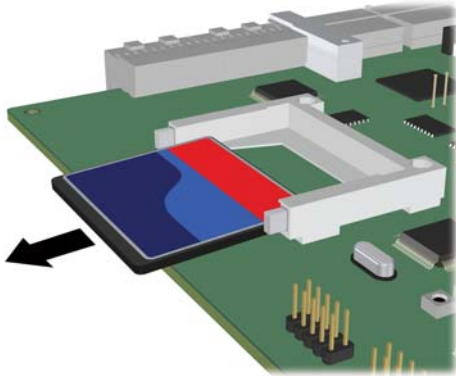

4.

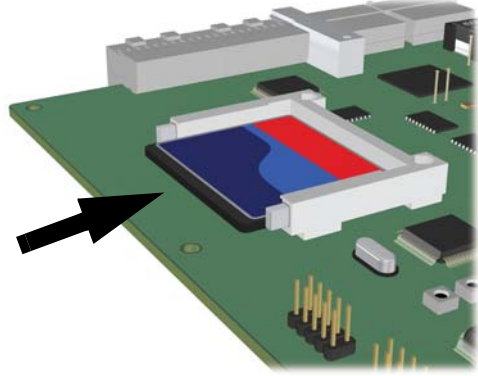

© Copyright 2006, 2007 Hewlett-Packard Development Company, LP. All rights reserved. The information contained herein is subject to change without notice.

This document contains proprietary information, which is protected by copyright. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of Hewlett-Packard.

Technical information in this document is subject to change without notice.



Part Number: 5991-8548
August 2007

